



MAKE IN INDIA




SCREENED SEPARABLE CONNECTOR upto 24 kV - 630 A

Gala Screened Separable Connectors are designed to connect single and three core polymeric cables to Medium Voltage Switchgear, Transformers, RMU (Ring Main Units) and other equipment using bushings type "C" specified for 630A upto 24kV. Made of a highly modified EPDM rubber and protected by a touch proof outer conductive screen connected to earth.

Supporting a wide application range, the design incorporates one body and stress cone adapters to cover all cross section from 25 to 400 sq. mm. All kits include high-performance multi range compression lugs matching the design of the connector.


Features and Benefits:


- Provides fully screened and submersible separable connection
- Matching with C type bushings and plugs complying with EN 50180 & EN 50181
- Compact design
- Each Connector is Factory tested for AC withstand and Partial Discharge (PD)
- Voltage class: 11kV, 15kV, 24kV
- Tested in compliance with IEC 60502.4

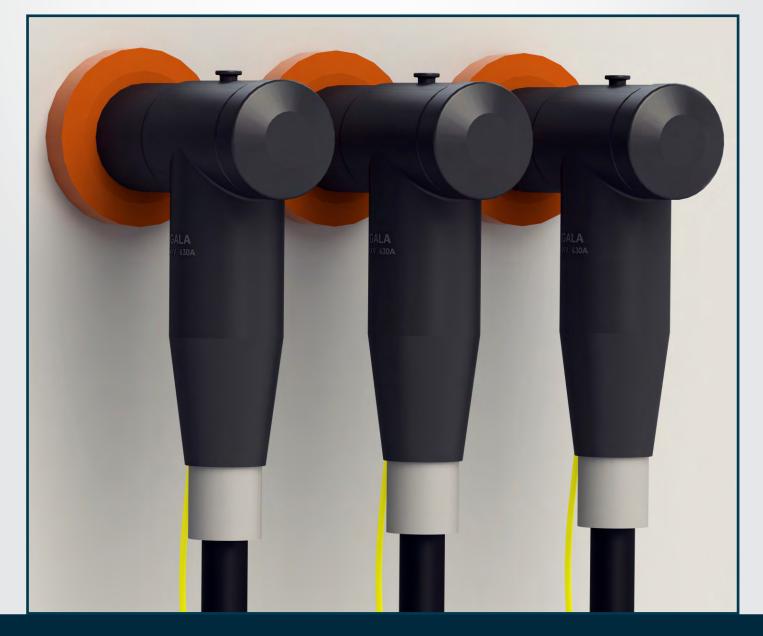


SCREENED SEPARABLE CONNECTOR upto 24 kV - 630 A

Technical Specification		
Voltage Class	11kV	24kV
Continuous Current	630A	630A
Alliance Bushing	EN 50180 & 50181 Type C	EN 50180 & 50181 Type C
AC Withstand Voltage	29kV for 5 min	54kV for 5 min
Impulse Withstand Voltage	95kV	125kV
(10 times for each Polarity)		
Partial Discharge at 1.73U0	≤10pC	≤10pC
Screen Resistance	≤5000Ω	≤5000Ω
Cable Cross-section	25-400mm ²	25-400mm ²

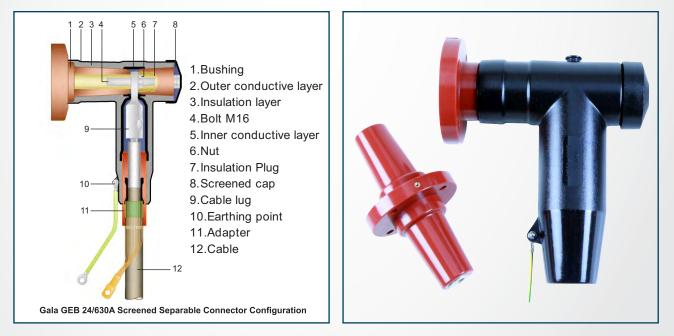


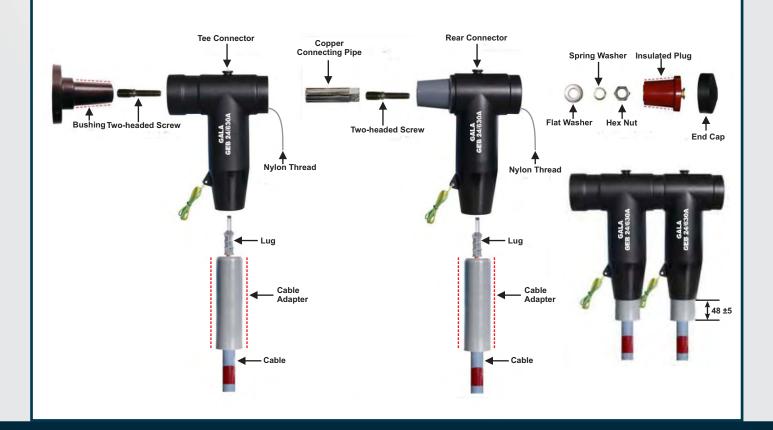

Ordering Informations

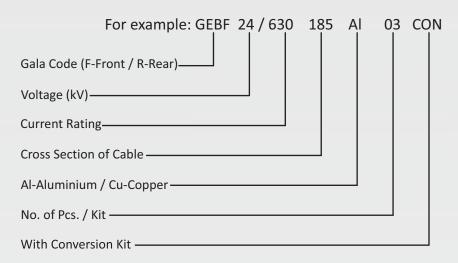

GEB connectors can adapt most of cables used in:

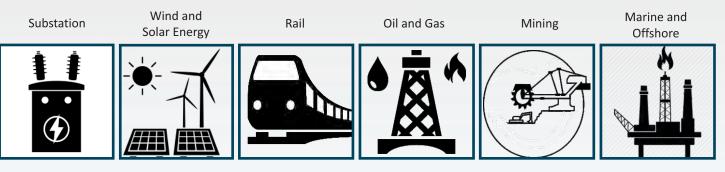

Area - 175,000 Sq.Ft.
Man Power - 550+ People
Established in more than 100 Countries
Captive Solar Generation of 780 kW







Unit No.: 404, 405 & 406, 4th Floor, C Wing, Eureka Tower, Behind Toyota Show Room, Mind Space, Link Road, Malad (West), Mumbai - 400 064, India P: +91 22 29675415 / 16 F: +91 22 2868 8990 E: info@galathermo.com W: www.galathermo.com